





RODAN®


REDUKČNÉ PRÍRUBY S VÝSTELKOU Z PTFE/PFA

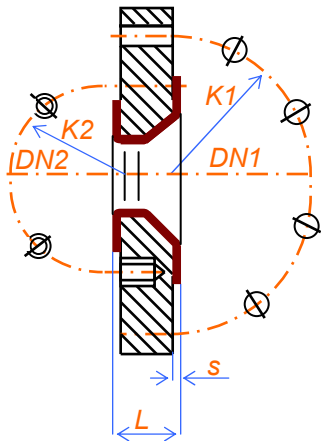

Typ A – otvory v prírubě podľa DIN

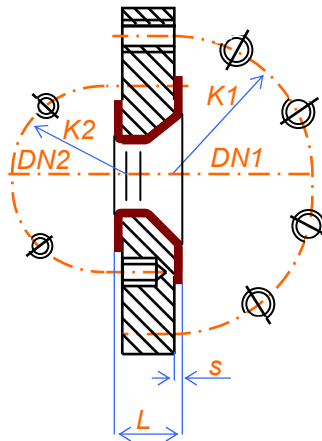

Typ B – otvory v prírubě podľa DIN



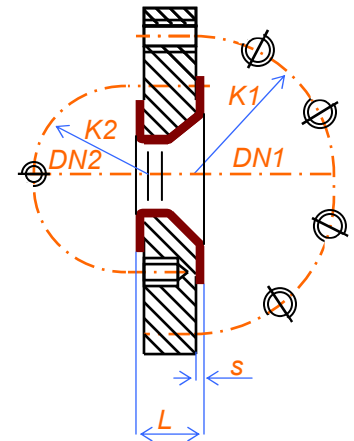


Typ C – K1 otvory v prírubě podľa DIN
K2 otvory na osi

DN 015 – 080, PN 10

DN 1/2" – 3", ASME/ANSI B16.5, Class 150 lbs


DN				s ± 10% mm	L mm	typ	hmotnosť kg
DIN		ANSI					
DN1	DN2	DN1	DN2				
020	015	3/4"	1/2"	3	35	C	2
025	015	1"	1/2"	3,5	35	C	3
025	020	1"	3/4"	3,5	35	C	3
032	020	1 1/4"	3/4"	3,5	35	B	3
032	025	1 1/4"	1"	3,5	35	C	4
040	020	1 1/2"	3/4"	4	35	C	4
040	025	1 1/2"	1"	4	35	C	4
040	032	1 1/2"	1 1/4"	4	35	C	4
050	020	2"	3/4"	4	35	B	5
050	025	2"	1"	4	35	B	5
050	032	2"	1 1/4"	4	35	C	5
050	040	2"	1 1/2"	4	35	C	5
065	020	2 1/2"	3/4"	4	35	B	6
065	025	2 1/2"	1"	4	35	B	6
065	032	2 1/2"	1 1/4"	4	35	B	5
065	040	2 1/2"	1 1/2"	4	35	C	5
065	050	2 1/2"	2"	4	35	C	5
080	025	3"	1"	4,5	35	A	6
080	032	3"	1 1/4"	4,5	35	B	6
080	040	3"	1 1/2"	4,5	35	B	6
080	050	3"	2"	4,5	35	B	6
080	065	3"	2 1/2"	4,5	35	B	6

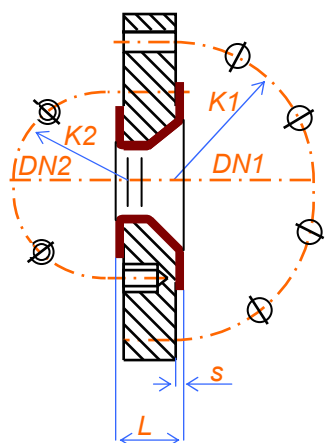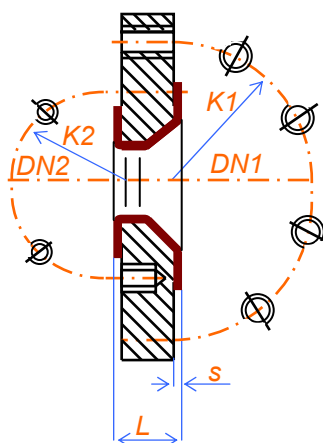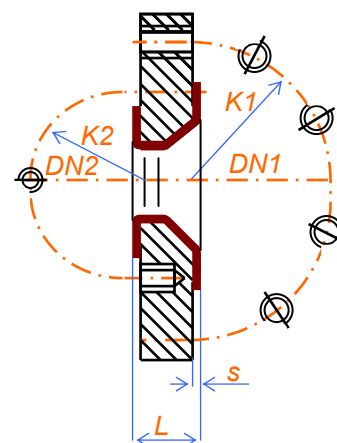REDUKČNÉ PRÍRUBY S VÝSTELKOU Z PTFE/PFA

Typ A – otvory v prírube podľa DIN

Typ B – otvory v prírube podľa DIN

Typ C – K1 otvory v prírube podľa DIN
K2 otvory na osi

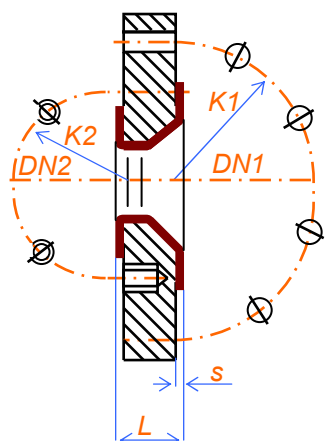
DN 100 – 150, PN 10

DN 4" – 6", ASME/ANSI B16.5, Class 150 lbs


DN		s ± 10% mm	L mm	typ	hmotnosť kg		
DIN	ANSI						
DN1	DN2	DN1	DN2				
100	025	4"	1"	4,5	45	A	11
100	032	4"	1 ¼"	4,5	45	A	11
100	040	4"	1 ½"	4,5	45	A	11
100	050	4"	2"	4,5	45	B	11
100	065	4"	2 ½"	4,5	45	B	10
100	080	4"	3"	4,5	45	C	10
125	025	5"	1"	4,5	45	A	14
125	032	5"	1 ¼"	4,5	45	A	14
125	040	5"	1 ½"	4,5	45	A	14
125	050	5"	2"	4,5	45	A	13
125	065	5"	2 ½"	4,5	45	B	13
125	080	5"	3"	4,5	45	B	12
125	100	5"	4"	4,5	45	C	12
150	025	6"	1"	5	45	A	18
150	032	6"	1 ¼"	5	45	A	18
150	040	6"	1 ½"	5	45	A	18
150	050	6"	2"	5	45	A	17
150	065	6"	2 ½"	5	45	A	17
150	080	6"	3"	5	45	A	16
150	100	6"	4"	5	45	B	15
150	125	6"	5"	5	45	C	14

REDUKČNÉ PRÍRUBY S VÝSTELKOU Z PTFE/PFA


Typ A – otvory v prírube podľa DIN

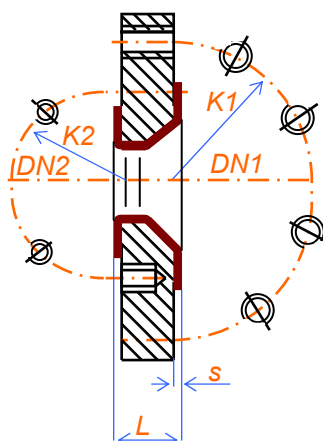

Typ B – otvory v prírube podľa DIN

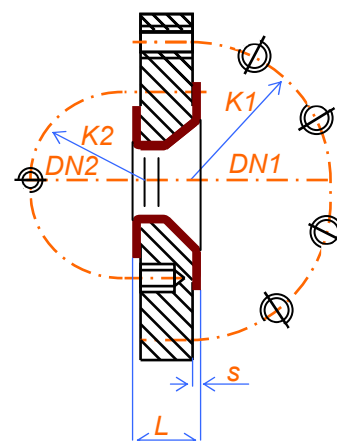


Typ C – K1 otvory v prírube podľa DIN
K2 otvory na osi


DN 200 – 300, PN 10

DN 8" – 12", ASME/ANSI B16.5, Class 150 lbs


DN		s ± 10% mm	L mm	typ	hmotnosť kg		
DIN	ANSI						
DN1	DN2	DN1	DN2				
200	050	8"	2"	5	45	A	26
200	065	8"	2 ½"	5	45	A	25
200	080	8"	3"	5	45	A	25
200	100	8"	4"	5	45	A	23
200	125	8"	5"	5	45	A	21
200	150	8"	6"	5	45	B	21
250	065	10"	2 ½"	5,5	45	A	36
250	080	10"	3"	5,5	45	A	35
250	100	10"	4"	5,5	45	A	34
250	125	10"	5"	5,5	45	A	32
250	150	10"	6"	5,5	45	A	30
250	200	10"	8"	5,5	45	B	28
300	080	12"	3"	5,5	50	A	57
300	100	12"	4"	6,5	50	A	55
300	125	12"	5"	6,5	50	A	53
300	150	12"	6"	6,5	50	A	50
300	200	12"	8"	6,5	50	A	45
300	250	12"	10"	6,5	50	B	40

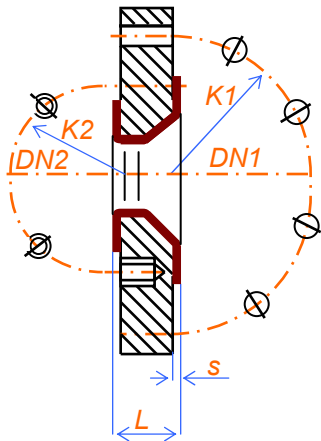REDUKČNÉ PRÍRUBY S VÝSTELKOU Z PTFE/PFA


Typ A – otvory v príрубе podľa DIN

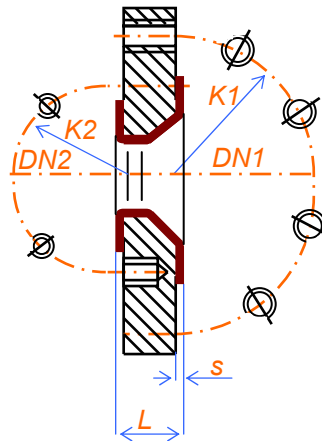

Typ B – otvory v príрубе podľa DIN

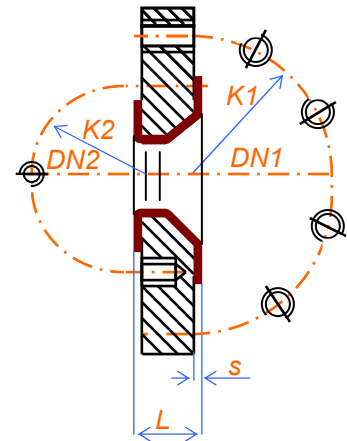


Typ C – K1 otvory v príрубе podľa DIN
K2 otvory na osi

DN 350 – 500, PN 10

DN 14" – 20", ASME/ANSI B16.5, Class 150 lbs

DN				s ± 10% mm	L mm	typ	hmotnosť kg
DIN		ANSI					
DN1	DN2	DN1	DN2				
350	100	14"	4"	6,5	50	A	69
350	125	14"	5"	6,5	50	A	66
350	150	14"	6"	6,5	50	A	61
350	200	14"	8"	6,5	50	A	58
350	250	14"	10"	6,5	50	A	51
350	300	14"	12"	6,5	50	B	49
400	125	16"	5"	6,5	50	A	84
400	150	16"	6"	6,5	50	A	81
400	200	16"	8"	6,5	50	A	76
400	250	16"	10"	6,5	50	A	68
400	300	16"	12"	6,5	50	A	60
400	350	16"	14"	6,5	50	B	63
500	150	20"	6"	6,5	50	A	120
500	200	20"	8"	6,5	50	A	110
500	250	20"	10"	6,5	50	A	100
500	300	20"	12"	6,5	50	A	94
500	350	20"	14"	6,5	50	A	89
500	400	20"	16"	6,5	50	A	84

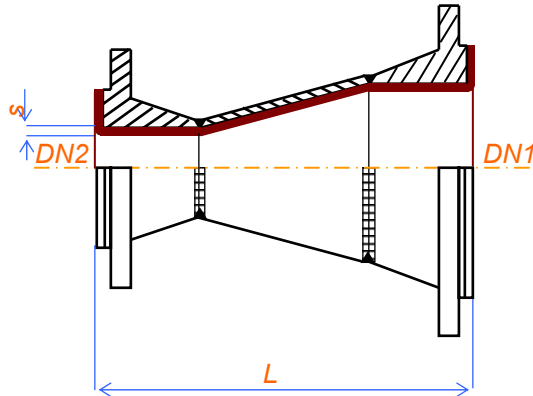**RODAN®****SÚSTREDNÉ REDUKCIE S VÝSTELKOU Z PTFE/PFA**

DN 015 – 125, PN 10


DN 1/2" – 5", ASME/ANSI B16.5, Class 150 lbs

DN				s ± 10% mm	L mm		hmotnosť kg
DIN		ANSI			DIN	ANSI	
DN1	DN2	DN1	DN2				
020	015	3/4"	1/2"	3	110	114	2
025	015	1"	1/2"	3,5	125	114	3
025	020	1"	3/4"	3,5	125	114	3
032	020	1 1/4"	3/4"	3,5	130	114	3
032	025	1 1/4"	1"	3,5	130	114	3
040	020	1 1/2"	3/4"	4	145	114	3
040	025	1 1/2"	1"	4	145	114	3
040	032	1 1/2"	1 1/4"	4	150	114	4
050	025	2"	1"	4	160	127	4
050	032	2"	1 1/4"	4	165	127	5
050	040	2"	1 1/2"	4	165	127	5
065	032	2 1/2"	1 1/4"	4	180	140	6
065	040	2 1/2"	1 1/2"	4	180	140	6
065	050	2 1/2"	2"	4	185	140	7
080	025	3"	1"	4,5	180	152	6
080	040	3"	1 1/2"	4,5	185	152	6
080	050	3"	2"	4,5	190	152	7
080	065	3"	2 1/2"	4,5	190	152	8
100	050	4"	2"	4,5	200	178	10
100	065	4"	2 1/2"	4,5	200	178	10
100	080	4"	3"	4,5	205	178	11
125	065	5"	2 1/2"	4,5	230	203	12
125	080	5"	3"	4,5	235	203	13
125	100	5"	4"	4,5	235	203	14

Štandardné prevedenie: pevné príruby

Možnosť prevedenia 1 voľná 1 pevná príruža alebo voľné príruby

SÚSTREDNÉ REDUKCIE S VÝSTELKOU Z PTFE/PFA

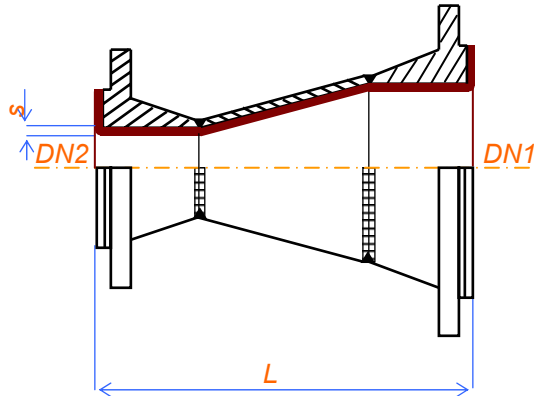


DN 150 – 500, PN 10
 DN 6" – 20", ASME/ANSI B16.5, Class 150 lbs

DN				s ± 10% mm	L mm		hmotnosť kg
DIN		ANSI			DIN	ANSI	
DN1	DN2	DN1	DN2				
150	080	6"	3"	5	250	229	17
150	100	6"	4"	5	250	229	18
150	125	6"	5"	5	250	229	20
200	100	8"	4"	5	270	279	22
200	125	8"	5"	5	270	279	23
200	150	8"	6"	5	270	279	25
250	125	10"	5"	5,5	305	305	34
250	150	10"	6"	5,5	305	305	36
250	200	10"	8"	5,5	310	305	42
300	150	12"	6"	6,5	330	356	44
300	200	12"	8"	6,5	335	356	46
300	250	12"	10"	6,5	340	356	51
350	200	14"	8"	6,5	465	406	66
350	250	14"	10"	6,5	465	406	72
350	300	14"	12"	6,5	465	406	79
400	250	16"	10"	6,5	495	457	95
400	300	16"	12"	6,5	495	457	101
400	350	16"	14"	6,5	495	457	112
500	300	20"	12"	6,5	650	508	167
500	350	20"	14"	6,5	650	508	189
500	400	20"	16"	6,5	650	508	207

Štandardné prevedenie: pevné príruby

Možnosť prevedenia 1 voľná 1 pevná príruha alebo voľné príruby

EXCENTRICKÉ REDUKCIE S VÝSTELKOU Z PTFE/PFA

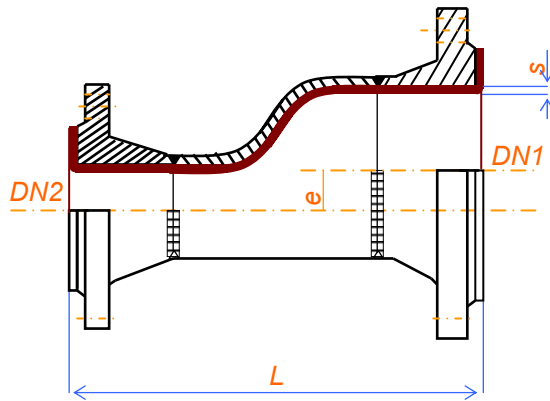


DN 015 – 125, PN 10
 DN 1/2" – 5", ASME/ANSI B16.5, Class 150 lbs

DN				s ± 10% mm	L mm		hmotnosť kg
DIN		ANSI			DIN	ANSI	
DN1	DN2	DN1	DN2				
020	015	3/4"	1/2"	3	110	114	2
025	015	1"	1/2"	3,5	125	114	3
025	020	1"	3/4"	3,5	125	114	3
032	020	1 1/4"	3/4"	3,5	130	114	3
032	025	1 1/4"	1"	3,5	130	114	3
040	020	1 1/2"	3/4"	4	145	114	3
040	025	1 1/2"	1"	4	145	114	3
040	032	1 1/2"	1 1/4"	4	150	114	4
050	025	2"	1"	4	160	127	4
050	032	2"	1 1/4"	4	165	127	5
050	040	2"	1 1/2"	4	165	127	5
065	032	2 1/2"	1 1/4"	4	180	140	6
065	040	2 1/2"	1 1/2"	4	180	140	6
065	050	2 1/2"	2"	4	185	140	7
080	025	3"	1"	4,5	180	152	6
080	040	3"	1 1/2"	4,5	185	152	6
080	050	3"	2"	4,5	190	152	7
080	065	3"	2 1/2"	4,5	190	152	8
100	050	4"	2"	4,5	200	178	10
100	065	4"	2 1/2"	4,5	200	178	10
100	080	4"	3"	4,5	205	178	11
125	065	5"	2 1/2"	4,5	230	203	12
125	080	5"	3"	4,5	235	203	13
125	100	5"	4"	4,5	235	203	14

Štandardné prevedenie: pevné príruby

Možnosť prevedenia 1 voľná 1 pevná príruha alebo voľné príruby

EXCENTRICKÉ REDUKCIE S VÝSTELKOU Z PTFE/PFA

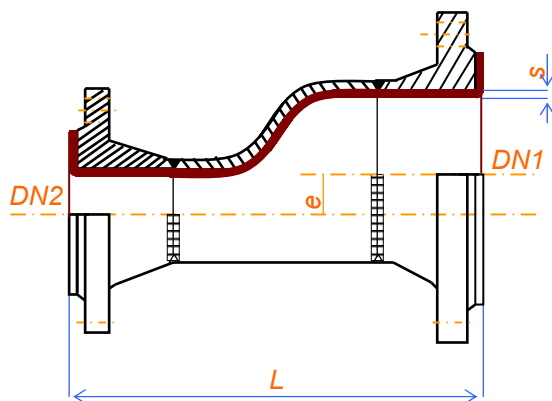

DN 150 – 500, PN 10
 DN 6" – 20", ASME/ANSI B16.5, Class 150 lbs

DN				s ± 10% mm	L mm		hmotnosť kg
DIN		ANSI			DIN	ANSI	
DN1	DN2	DN1	DN2				
150	080	6"	3"	5	250	229	17
150	100	6"	4"	5	250	229	18
150	125	6"	5"	5	250	229	20
200	100	8"	4"	5	270	279	22
200	125	8"	5"	5	270	279	23
200	150	8"	6"	5	270	279	25
250	125	10"	5"	5,5	305	305	34
250	150	10"	6"	5,5	305	305	36
250	200	10"	8"	5,5	310	305	42
300	150	12"	6"	6,5	330	356	44
300	200	12"	8"	6,5	335	356	46
300	250	12"	10"	6,5	340	356	51
350	200	14"	8"	6,5	465	406	66
350	250	14"	10"	6,5	465	406	72
350	300	14"	12"	6,5	465	406	79
400	250	16"	10"	6,5	495	457	95
400	300	16"	12"	6,5	495	457	101
400	350	16"	14"	6,5	495	457	112
500	300	20"	12"	6,5	650	508	167
500	350	20"	14"	6,5	650	508	189
500	400	20"	16"	6,5	650	508	207

Štandardné prevedenie: pevné príruby
 Možnosť prevedenia 1 voľná 1 pevná príruha alebo voľné príruby