



**GULŔOVÉ SPÄTNÉ VENTILY S VÝSTELKOU Z PTFE  
na vertikálne zabudovanie**

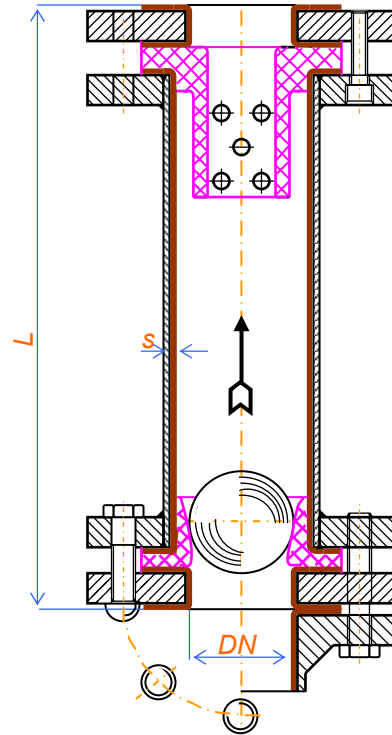

DN		s	L		hmotnosť kg
DIN	ANSI		DIN	ANSI	
025	1"	3,5	160	178	5
032	1 ¼"	3,5	180	190	7
040	1 ½"	4	200	204	9
050	2"	4	230	228	15
065	2 ½"	4	230	254	26
080	3"	4,5	310	280	32
100	4"	4,5	350	330	46
125	5"	4,5	325	380	79
150	6"	5	350	406	88
200	8"	5	400	458	126

Pevné príruby.

## GUĽOVÉ SPÄTNÉ VENTILY S VÝSTELKOU Z PTFE na vertikálne a horizontálne zabudovanie

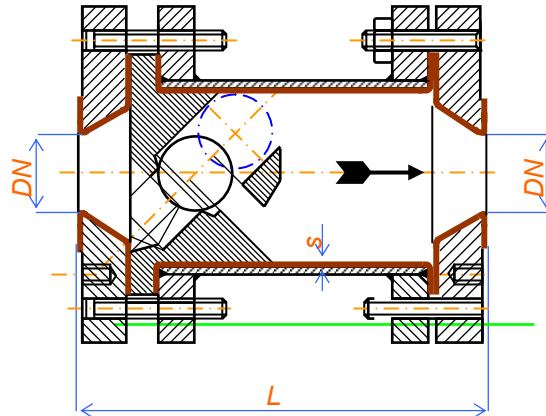

DN		s	L		hmotnosť kg
DIN	ANSI		DIN	ANSI	
025	1"	3,5	160	178	8
032	1 ¼"	3,5	180	190	15
040	1 ½"	4	200	204	17
050	2"	4	230	228	24
065	2 ½"	4	230	254	29
080	3"	4,5	310	280	34
100	4"	4,5	350	330	58
125	5"	4,5	325	380	82
150	6"	5	350	406	93
200	8"	5	400	458	137

Pevné príruby.